



FlexicurtaIn[®]
industrial curtain

RETRACTABLE PVC CURTAIN WALL OR DOOR

FlexicurtaIn is an internal or external retractable curtain wall used to provide temporary segregation of two areas.

Typical applications are to prevent cross contamination and overspray, create booths, segregate production lines during washdown, manage temperature and segregate large areas where regular access is required. Externally FlexicurtaIn can offer accessible entry with weather protection on canopies and enclosures.

Using a range of standard fire rated PVC materials, FlexicurtaIn can be designed bespoke with a number of optional extras.



ASK US
FOR A
FABRIC
SAMPLE

Key features



Prevent cross contamination



Protect employees



Quick to deploy



Fire rated materials



Antibacterial materials



Keep production moving

Typical uses include;

- Segregation of production lines for washdown processes
- Create a retractable wall which restricts airflow in order to manage temperature
- Prevent cross contamination between production lines
- Canopy enclosure and weather protection
- Employee protection; welding curtains, spray booths, robot surrounds
- Temporary retractable segregation where large construction equipment needs access


Benefits

- Installs quickly and cleanly
- Designed and manufactured to any height or length (subject to survey)
- Electric or manual operations
- Range of bespoke design options
- Resistance tested against a range of cleaning products
- Anti-fungal materials for food, beverage and packaging environments
- Install wind load straps for external applications
- Optional extras include vision panels, stainless steel tracks, suspended tracks, single run or bi-parting applications, wind load straps (external applications) with manual or electric operation


Technical data

Material composite:	choice of woven glass fabric or polyester base and a range of PVC, PU or silicon coatings <small>(*range of base fabric and coatings depending on your project requirement)</small>
Material weight:	between 475gsm-1300gsm
Tensile strength:	between 1000N-4800N / 50mm
Tear strength:	between 100N-850N
Material fire rating examples:	BS476, Part 22 (90mins), M0 standard, Class 0, BS 5867:2008 Part 2 Type A & B, LPS1207, LPS1215, B7837 <small>(*subject to material specification, all fire ratings supplied at quote stage)</small>
Operating temperature:	between -25 / +70 degrees centigrade


Installation



Flexicurtain is hung and runs on a rail which is installed bespoke, depending on the environment and what existing structure is available



Westgate's unique trolleys sit in the rail and provide a smooth run

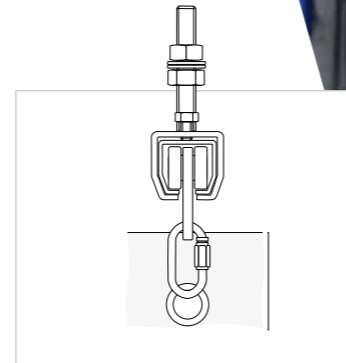

Your chosen Flexicurtain material is then hung from the trolleys to create a retractable industrial curtain

GET OPTIONAL EXTRAS: DOOR, ACCESS AND PROTECTION SYSTEMS



WE HAVE CREATED SOLUTIONS FOR MANY INCLUDING...



CALL US TODAY ON +44 (0)1785 242181 AND BOOK A NO OBLIGATION SITE SURVEY WITH ONE OF OUR SECTOR SPECIALISTS...

Could Flexicurtain work for you? Find out more at westgateuk.co.uk/flexicurtain